

FIRST

« FIRST: the first price halogen uplighter. Equipped with a dimmer of the luminous flux. »

LIGHTING

The power of halogen source

The FIRST range is equipped with a halogen tube high efficiency 230W R7S, diffusing a warm and powerful lighting : friendly and pleasant atmosphere.

INTENSITY DIMMING

Lighting flux of FIRST adjustable in power

That uplighter is equipped with a dimmer-switch located on the wire, easy to reach, enabling to dim the lighting intensity and the consumption.

Adapt the lighting flux according to your needs.

THOUGHT-OUT-DESIGN


Sober lines

The bowl of the FIRST uplighter is fitted with a reflector in recyclable aluminium ensuring an optimal diffusion of the indirect lighting. Its small base guarantees the stability of the whole, even near traffic areas. Available in black and metal grey.

The tilting version of FIRST Black enables you to bring the light above the work surface.



DIMENSIONS

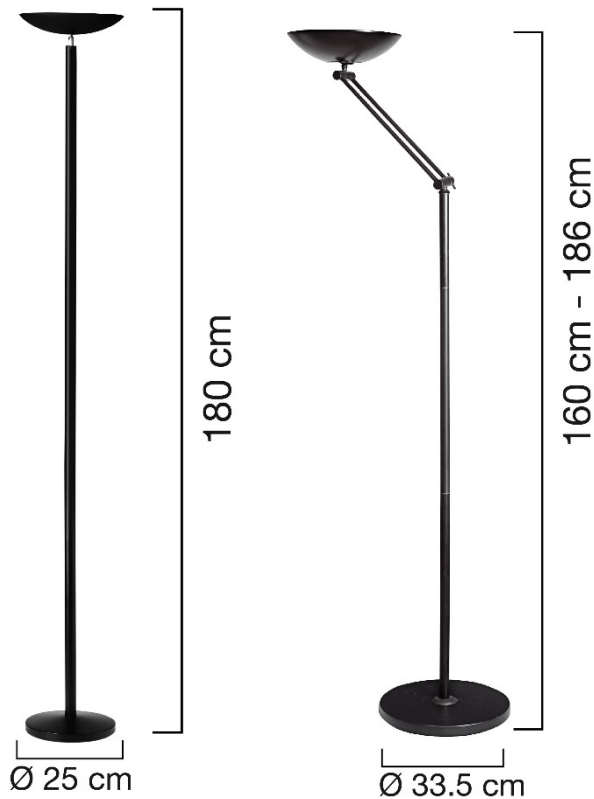

TECHNICAL FEATURES



Materials

Steel, Epoxy coating

Reflector in recyclable aluminium

Source

Halogen tube 230W RS7 (supplied)

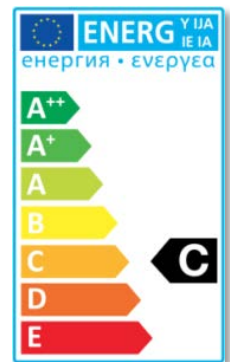

SAP no.	Colours	Energy consumption KW/1000 h	Lm	Lm/W	Colour T°	CRI	Source's lifetime*	Warranty	Net weight	EAN code
100340557	Black	230	5060	22	2900 K	100	2 years	1 year	5,56kg	3595560007240
100340559	Met grey	230	5060	22	2900 K	100	2 years	1 year	5,56kg	3595560006595
100340570	Black Articul.	230	5060	22	2900 K	100	2 years	1 year	9,00kg	3595560003426

* Calculated on the basis of a 1000 hours use of the lighting material per year